

PH-3200 Series

Regulators - Pressure Reducing

DPH321978X012

Specifications

For other materials or modifications, please consult TESCOM.

OPERATING PARAMETERS

Pressure rating per criteria of ANSI/ASME B31.3

Maximum Inlet Pressure

500 psig / 34.5 bar

Outlet Pressure Ranges

0-25, 0-50, 0-100, 0-150 psig / 0-1.7, 0-3.4, 0-6.9, 0-10.3 bar

Design Proof Pressure

150% maximum rated

Leakage

Internal: ANSI Class VI Shutoff

External: designed to meet $< 2 \times 10^{-8}$ atm cc/sec He

Operating Temperature (media only)

Teflon® Seat: -40°F to 165°F / -40°C to 74°C

PEEK-OPTIMA® or PEEK-Classix® Seat: -40°F to 400°F / -40°C to 204°C

Flow Capacity

$C_v = 1.8, 1.0$



MEDIA CONTACT MATERIALS

Body

316L Stainless Steel

Seat

Teflon®, PEEK-OPTIMA®, PEEK-Classix®

O-Ring

Ethylene Propylene (E.P.)

Diaphragm

316 Stainless Steel

Seat Retainer

Nitronic 60

Remaining Parts

316 Stainless Steel

OTHER

Connections

Sanitary Fittings

Tube Ends

High Purity Internal Connections (H.P.I.C.) (gauge port only)

Cleaning

CGA 4.1 and ASTM G93, Clean Service Certificate of Compliance available

Weight (approximately)

3.5 lbs / 1.6 kg

Teflon® is a registered trademark of E.I. du Pont de Nemours and Company.

PEEK-OPTIMA® is a registered trademark of Invibio Ltd.

PEEK-Classix® is a registered trademark of Invibio Ltd.

TESCOM PH-3200 Series is part of our Pharmpure™ product line. This high purity high flow single-stage regulator offers a compact, USP Class VI and BPE compliant design suitable for biotech and pharmaceutical applications. This regulator offers gas flows of 5-50 SCFM / 142-1416 SLPM. Diffusion-resistant metal-to-metal diaphragm seal ensures gas purity and integrity.


Applications

- Sparge gases
- Clean steam for sanitization
- Transfer panels

Features and Benefits

- 316L Stainless Steel barstock regulator body design
- FDA/USP compliant designs are available
- Clean Service Certification of Compliance is available: Includes actual material certification, weld records, and bill of materials
- 15 or 32 R_a microinch / 0.38 or 0.81 micrometer body surface finish standard
- Precise pressure control
- Gauge port is available
- ASME BPE 2009 compliant design



PH-3200 Series Regulator Drawing

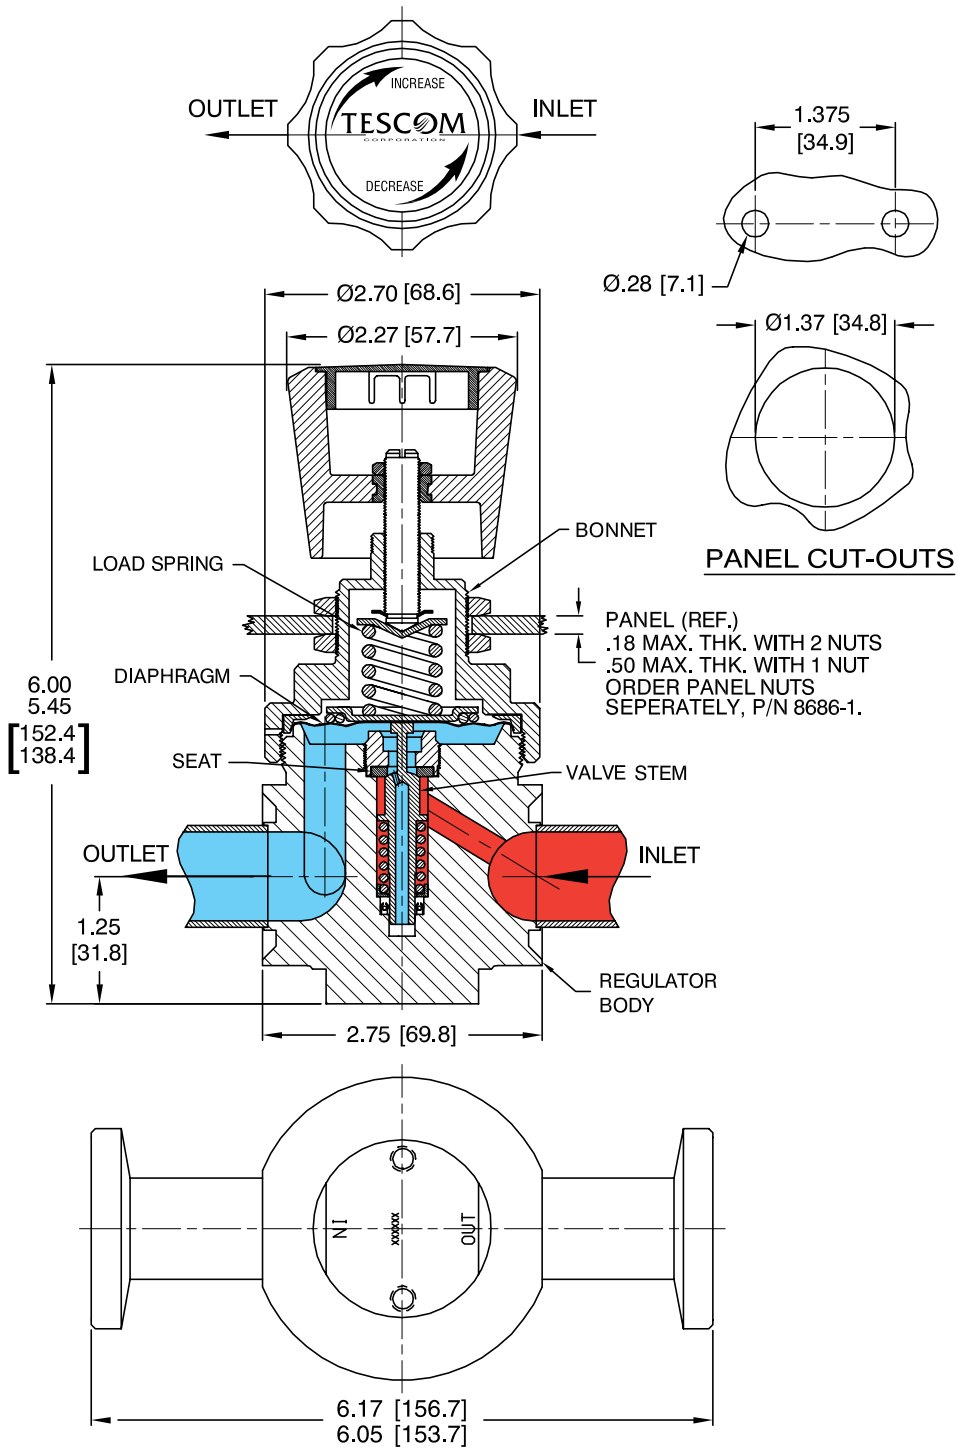

All dimensions are reference & nominal
 Metric [millimeter] equivalents are in brackets

PH-3200 Series Regulator Flow Charts



For more information on how to read flow curves, please refer to the Flow Curves and Calculations document (debul2007x012) in the TESCOM catalog or on www.tescom.com.

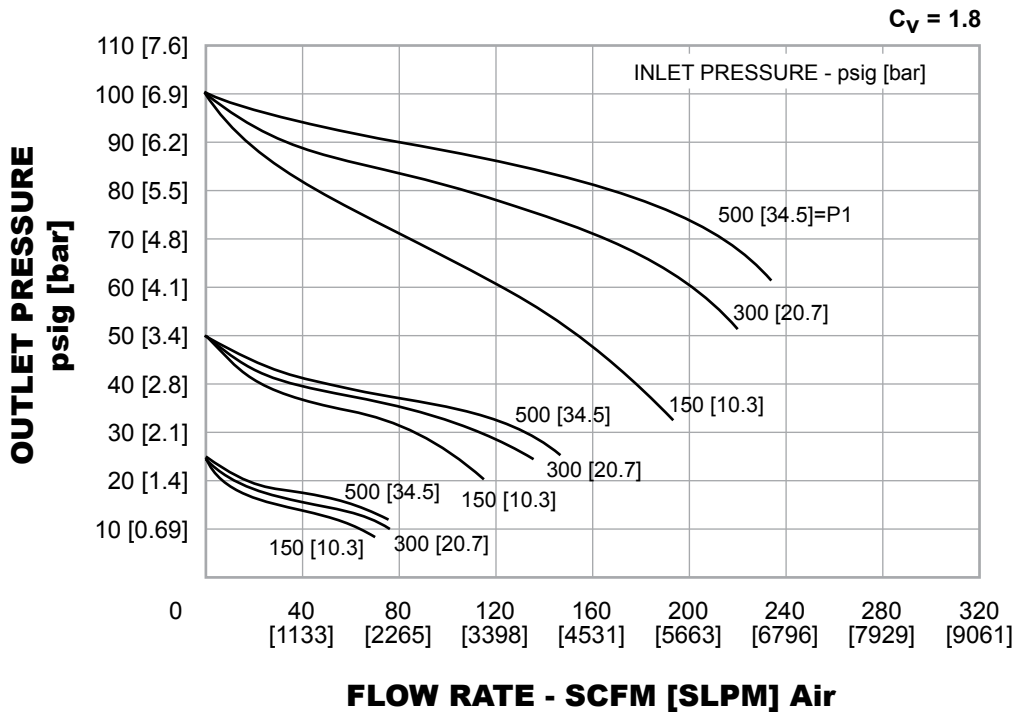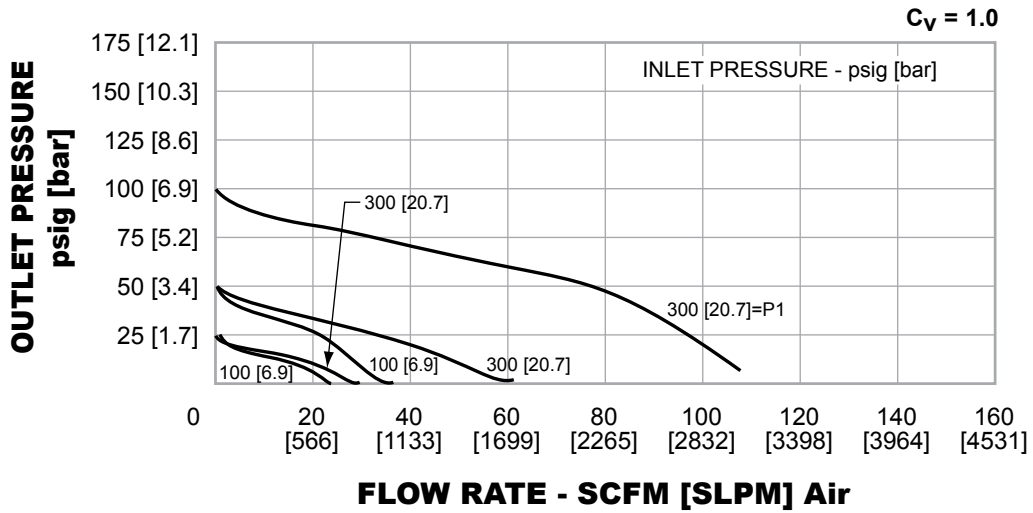

PH-3200 Series Regulator Part Number Selector

Repair Kits, Accessories & Modifications may be available for this product. Please contact TESCOM for more information.

Example for selecting a part number:

PH-32	A				0	8	08	3	0	B	
BASIC SERIES	BODY MATERIAL	BODY SURFACE FINISH	SEAT MATERIAL	SEAL MATERIAL	LOAD TYPE	OUTLET PRESSURE	INLET AND OUTLET PORT TYPE	INLET AND OUTLET PORT SIZE WALL THICKNESS	FLOW CAPACITY	GAUGE PORT OPTIONS	CERTIFICATE OF CONFORMANCE
PH-32	A – 316L Stainless Steel	15 R _a	Teflon®	E.P. O-Ring	0 – Spring	0-25 psig 0-1.7 bar	8 – Sanitary 9 – Tube	08 – 1/2" 0.500" OD x 0.065" wall	2 – C _v = 1.8 3 – C _v = 1.0	0 – No gauge ports 	A – None B – Clean Service Certification
	B – 316L Stainless Steel	15 R _a	PEEK	E.P. O-Ring	1 – Spring	0-50 psig 0-3.4 bar		12 – 3/4" 0.750" OD x 0.065" wall		1 – One 3/4" sanitary outlet gauge port at 90°	
	C – 316L Stainless Steel	32 R _a	Teflon®	E.P. O-Ring	2 – Spring	0-100 psig 0-6.9 bar				2 – One 1/4" HPIC outlet gauge port at 90°	
	D – 316L Stainless Steel	32 R _a	PEEK	E.P. O-Ring	3 – Spring	0-150 psig 0-10.3 bar					



WARNING! Do not attempt to select, install, use or maintain this product until you have read and fully understood the *TESCOM Safety, Installation and Operation Precautions*.

DPH321978X012 © 2012 Emerson Process Management Regulator Technologies, Inc. All rights reserved. 05/2012.
 Tescom, Emerson Process Management, and the Emerson Process Management design are marks of one of the Emerson Process Management group of companies. All other marks are the property of their respective owners.