

Regulus 4

Regulators - Pressure Reducing

DCATLABO1204XEN2

Specifications

For other materials or modifications, please consult TESCOM.

FLUID MEDIA

Non-corrosive gases up to gas purity 5.0 (99.999 Vol %)

OPERATING PARAMETERS

Pressure rating per criteria of ANSI/ASME B31.3

Maximum Inlet Pressure

290 psig / 20.0 bar

Outlet Pressure Ranges

0.07-0.73 psig / 5-50 mbar

0.73-7.25 psig / 50-500 mbar

2.9-22 psig / 0.20-1.5 bar

14.5-58 psig / 1.00-4.0 bar

Nominal Flow

Max. 72 (m³/h air)

Operating Temperature

-4°F to 158°F / -20°C to 70°C

MEDIA CONTACT MATERIALS

Body

Aluminum

Diaphragm

Butyl Rubber with PTFE coating

Seat

NBR

OTHER

Port Types and Sizes

Inlet:

Adapter: M16 x 1.5

Body: G 3/4"

Outlet: G 1 1/4"

Gauge: G 1/2"

Relief Valve: L12, DIN 3853 (M18 x 1.5 + cone)

Connections

See Part Number Selector

Weight

9.3 lbs / 4.2 kg



TESCOM Regulus 4 dual-stage pressure reducer, with an integrated relief valve, is extremely sensitive (mbar range) for gas purity up to 5.0.


Applications

- Can be used as an in-line pressure reducer
- Suitable for non-corrosive gases
- Suitable for Oxygen service
- Commonly used in production testing

Features and Benefits

- Regulation in mbar range
- Dual-stage for constant outlet pressure
- Accurate pressure regulation
- High flow up to 1200 SLPM (air)
- Integrated relief valve


Regulus 4 Regulator Drawing

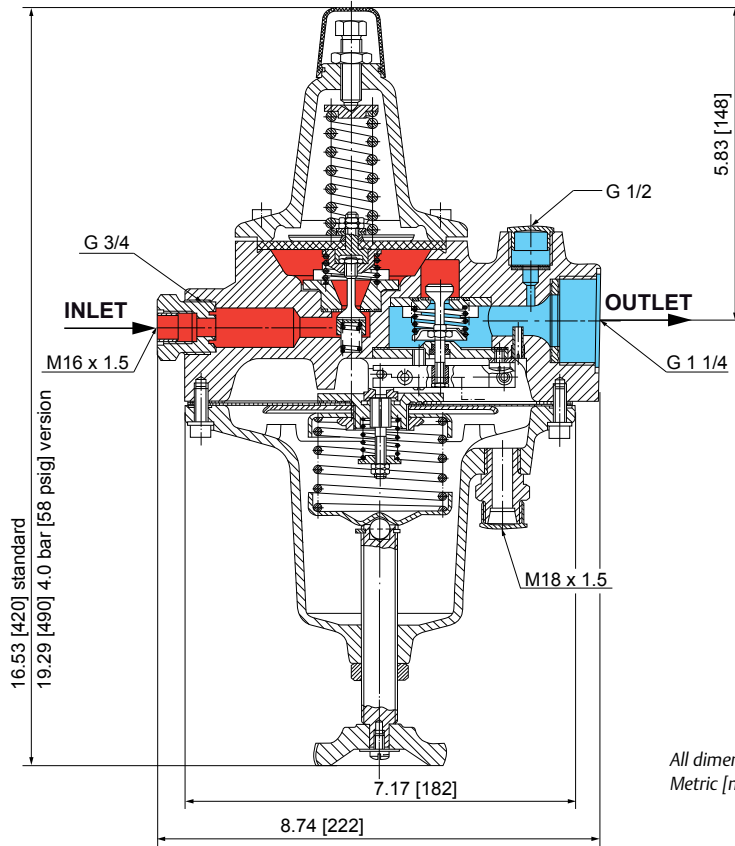

All dimensions are reference & nominal
Metric [millimeter] equivalents are in brackets

Accessories



Pos.	Part Number	Description
1	E08791	Plug G 1/2"
2	7232784	Gauge Brass 100-60/50 mbar
2	7232795	Gauge Brass 100-60/50 mbar O ₂
2	7232786	Gauge Brass 100-600/500 mbar
2	7232797	Gauge Brass 100-600/500 mbar O ₂
2	7232788	Gauge Brass 100-2.5/1.5 bar
2	7232799	Gauge Brass 100-2.5/1.5 bar O ₂
2	7233081	Gauge Brass 100-6/4 bar O ₂
3	D10069	Inlet connection M16 x 1.5-G 3/8" without filter
4	D40161	Fitting Brass G 3/8"-8 mm
4	D40078	Fitting Brass G 3/8"-10 mm
4	D40865	Fitting Brass G 3/8"-12 mm
4	V01699	Profile seal G 3/8"
5	D13462	Inlet connection M16 x 1.5-G 1/2"
6	V03807	Soldering connection G 3/4"-8mm
6	V04207	Soldering connection G 3/4"-16mm
6	V04107	Soldering connection G 3/4"-22mm
6	D07384	Cu-profile seal G 3/4"
7*	D51721-NFG	Filter
7*	D51721-FG	Filter
7*	D51721-O2	Filter
8	D17292	Adapter G 1 1/4"-G 1 1/4"
9	V09130	Soldering connection G 1 1/4"-28 mm
10	D17873	Wall mounting bracket

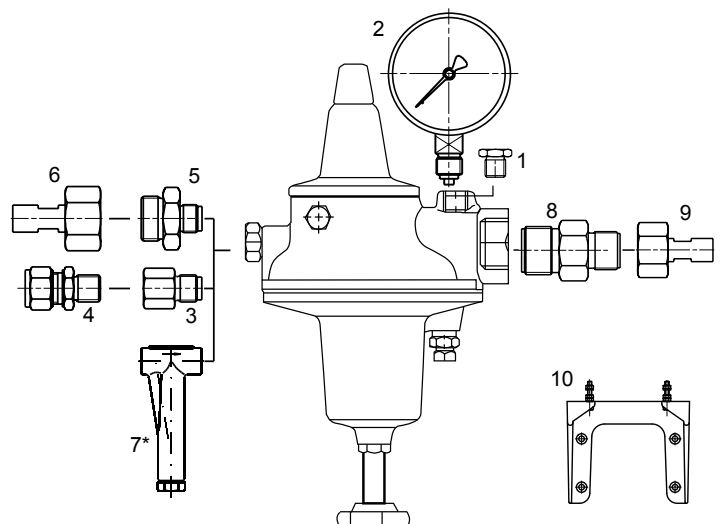

*Remove inlet adapter if use of external filter D51721-XXX is required

Regulus 4 Flow Charts

For more information on how to read flow curves, please refer to the Flow Curves and Calculations document (debul2007x012) in the TESCOM catalog or on www.tescom.com.

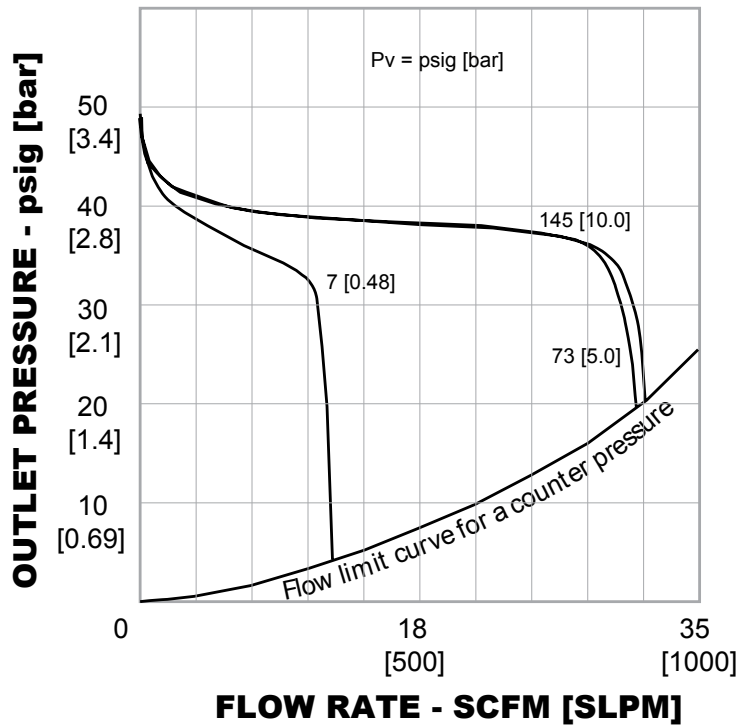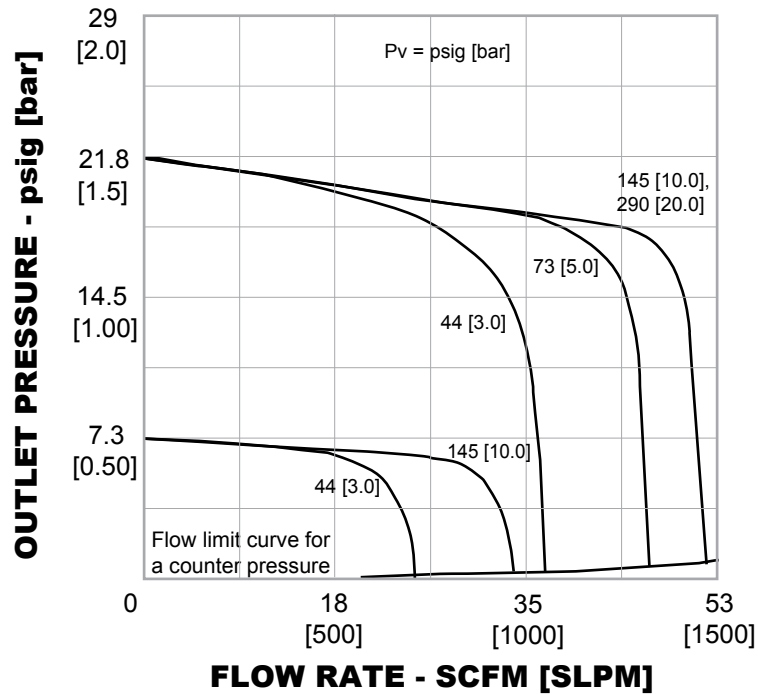

Regulus 4 Part Number Selector

Repair Kits, Accessories & Modifications may be available for this product. Please contact TESCOM for more information.

Example for selecting a part number:

D42320		-	12	-	24	-	M
BASIC SERIES	OUTLET PRESSURE RANGES	GAS		OUTLET CONNECTIONS		GAUGE	
D42300	0.07-0.73 psig / 5-50 mbar	12 – Oxygen		00 – Without		M – Gauge	
D42320	0.73-7.25 psig / 50-500 mbar	15 – Non-flammable gases		24 – Adapter G 1 1/4" and soldering connection for tube Ø 28 mm		--- – No gauge, with plug G 1/2"	
D42840	2.9-22 psig / 0.20-1.5 bar	16 – Flammable gases					
D17880	14.5-58 psig / 1.00-4.0 bar						



WARNING! Do not attempt to select, install, use or maintain this product until you have read and fully understood the *TESCOM Safety, Installation and Operation Precautions*.

DCATLABO1204XEN2 © 2012 Emerson Process Management Regulator Technologies, Inc. All rights reserved. 05/2012.
 Tescom, Emerson Process Management, and the Emerson Process Management design are marks of one of the Emerson Process Management group of companies. All other marks are the property of their respective owners.